

GS Series Membrane Filters

Balston GS Series Membrane Filters

The Balston GS Series Membrane Filter Cartridges combine absolute membrane filtration down to 0.01 μm , with an integral pre-filter to protect the membrane.

Ideally suited for high purity compressed air and gas requirements, these membrane cartridges are available in several housing configurations shown above.

Use as a Final Filter for:

Ultra-high purity gases
Corrosive or toxic gases
Cylinder gases
Doping gases



Product Features:

- Filtration to 0.01 micron
- No particle shedding
- Integral prefilter protects the membrane
- Corrosion resistant housings
- Pressure to 5,000 psig
- No particle shedding
- PTFE membrane with glass and fluorocarbon prefilter
- Chemically inert to most gases
- Easy to install

Specialty Gas Filtration



Analytical Gas Filtration



Process Gas Filtration




Critical Blow Off Applications



0.01 Micron Membrane Filters


0.01 μm Membrane Filters

The GS Membrane Cartridges represent state-of-the-art membrane filtration technology. An integral prefilter, bonded to a porous PTFE membrane, provides the user with extended membrane life, 0.01 μm filtration rating, and, most importantly, zero fiber shedding. The Balston GS Membrane filter also offers excellent chemical compatibility as a result of the inert materials of construction. All of these features combine to make the Balston GS cartridges the ideal choice for critical process gas filtration requirements.

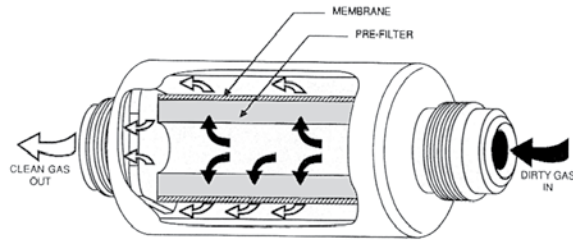

Membrane Life Expectancy Comparison

Balston GS Membrane Cartridges, with their unique integral prefilter, offer up to 18 times the operating life of conventional membrane cartridges (as indicated in the life expectancy comparison below).

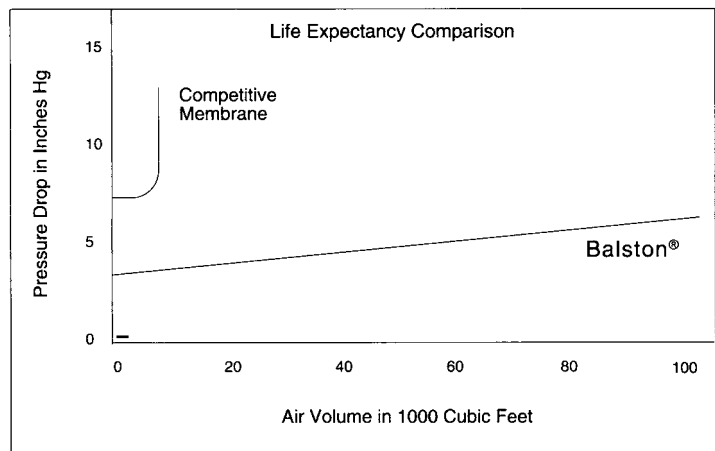

Physical Properties, GS Membrane Cartridges

Temperature Range	-40°F to 250°F (-40°C to 121°C)
Maximum pressure differential across membrane, Inside-to-outside flow:	20 psi (size code 100 and 200) 60 psi (size code 050)
Materials of Construction:	Borosilicate glass with fluorocarbon resin binder prefilter and PTFE membrane
Retention Efficiency:	0.01 μm

0.01 Micron Membrane Filters

Retention Efficiency Rating

The retention efficiencies of the Balston GS Series membrane cartridges were derived by John McCarthy, a staff research scientist at M.I.T. Dr. McCarthy used a submicron particle detection and sizing device to collect and analyze the filter efficiency data. The test procedure consisted of challenging the membrane filter with a sodium chloride aerosol solution which contained aerosol particles in a narrowly defined size range. Downstream from the filter, the effluent gas was evaluated for particulate contaminant size using a condensation nucleus counter.

There was no detectable penetration of 0.01 μm particles through the membrane filters. Bulletin TI-834 details the efficiency rating procedure and experimental results of this study.

Chemical Compatibility		
The GS Series Membrane Filter cartridges are compatible with the following gases (when installed in a stainless steel filter housing with PTFE seals).		
Ammonia	Chlorine (dry)	Hydrogen Bromide
Air (Compressed)	Diborane	Methylene Chloride
Argon	Dichlorosilane	Nitrogen
Arsine	Fluorine (dry)	Nitrous Oxide
Boron Trichloride	Freon	Phosphorous Oxychloride (dry)
Carbon Dioxide	Helium	Phosphine
Carbon Tetrafluoride	Hydrogen	Silane

0.01 Micron Membrane Filters

Disposable Membrane Assemblies

Disposable Filter Units (DFU's)

Consist of a membrane filter and an integral prefilter, permanently bonded into a plastic housing. DFU's have pressure ratings to 125 psig, and may be installed using a variety of fitting systems.

9933-05-95

Available in a transparent nylon housing, this DFU is an ideal choice for an economical membrane filter for use where its chemical compatibility is suitable.

9922-11-95

This opaque PVDF DFU, with approximately double the membrane area of the 9933-05-95, is used where exceptional chemical compatibility is required.



Model 9933-05-95



Model 9922-11-95

Principal Specifications

Model	9933-05-95	9922-11-95
Inlet and Outlet Ports	1" Tube	1" Tube
Materials of Construction		
Housing	Nylon	PVDF
Cartridge	PTFE/Glass	PTFE/Glass
Seals	None	None
Maximum Temperature	230°F(110°C)	250°F(121°C)
Maximum Pressure	125 psig	125 psig
Maximum Δ Pressure	60 psi	60 psi
Shipping Weight	0.1 lb (45 g)	0.2 lb (90 g)
Dimensions	3.25"H X 1.0"W (8cm X 2.5cm)	4.6"H X 1.43"W (12cm X 3.6cm)

Ordering Information

For assistance, call toll-free at 1-800-343-4048

Filter Assembly (1) Complete with Membrane Filter Cartridge

	Description
9933-05-95	In-line Nylon disposable filter with GS Membrane Cartridge
9922-11-95	In-Line disposable PVDF filter with GS Membrane Cartridge

Notes:


1 Disposable Filter Units are sold in boxes of 3 or 10. For example, a box of 3 DFU's in nylon housings, order: 3/9933-05-95. For a box of 10, order: 9933-05-95.

0.01 Micron Membrane Filters

Stainless Steel or PTFE Filter Housings - 1/8" to 1/2" Line Size

97S6

Miniature 316 stainless steel filter, with 1/4" NPT in-line ports, 5000 psig rating. The 97S6 has a replaceable membrane cartridge and is an economical alternative when a disposable product is not required.



Model 97S6



Model 91S6, 95S6, 95T
(95S6 Shown)

91S6, 95S6, 95T

Miniature T-Type filters in 316 stainless steel. The 91S6 is rated for 650 psig, the 95S6 is rated for 5000 psig. The 95T is constructed of PTFE, and is rated at 150 psig. The membrane cartridge is changed without breaking the inlet or outlet connections.

31S6, 33S6

Have 1/4" or 1/2" ports, 425 psig rating, can handle a higher gas flow rate, and have greater solids holding capacity than the Type 95 filters.



Model 31S6, 41S6
(31S6 Shown)

41S6, 45S6

Are higher flow rate stainless steel filters with 1/4" or 1/2" NPT ports. The Type 45, with stainless steel bowl, has a 250 psig rating.



Model 33S6, 45S6
(45S6 Shown)

Membrane
Filters

0.01 Micron Membrane Filters

Stainless Steel or PTFE Filter Housings - 1/8" to 1/2" Line Size

Principal Specifications						
Model	97S6	91S6	95S6	95T	31S6, 33S6	41S6, 45S6
Inlet and Outlet Ports	1/4" NPT (3)	1/8" NPT (2,3)	1/8" NPT (2,3)	1/8" NPT (2,3)	1/2" NPT (2,3)	1/2" NPT (2,3)
Drain Port	None	1/8" NPT	1/8" NPT	1/8" NPT	1/4", 1/8" NPT (7)	1/4", 1/8" NPT (7)
Materials of Construction						
Head	316SS	316SS	316SS (5)	PTFE (5)	316SS	316SS
Bowl	316SS	316SS	316SS (5)	PTFE (5)	316SS	316SS
Internals	316SS	316SS	316SS (5)	PTFE (5)	316SS	316SS
Seals	Viton (6)	PTFE (4)	PTFE (4)	Viton (4,6)	Viton (6)	Viton (6)
Maximum Temperature	400°F(204°C)	400°F(204°C)	400°F(204°C)	300°F(149°C)	400°F(204°C)	400°F(204°C)
Maximum Pressure	5000 psig (1)	650 psig (1)	5000 psig (1)	150 psig (1)	425 psig (1)	250 psig (1)
Shipping Weight	0.8 lbs (0.4 kg)	1.2 lbs. (0.5 kg)	1.3 lbs. (0.6 kg)	0.5 lbs. (0.2 kg)	5 lbs. (2.3 kg)	5.5 lbs. (2.5 kg)
Dimensions	1.25"D X 3.1"L (3.2cm X 7.9cm)	1.5"D X 3.7"L (3.8cm X 9.4cm)	1.8"D X 4"L (4.6cm X 10.2cm)	1.8"D X 4"L (4.6cm X 10.2cm)	2.25"D X 5.5"L (31S6)	2.25"D X 10"L (41S6)
					2.6"D X 4.5"L (33S6) (5.7cm X 14cm) (31S6) (2.6cm X 4.5cm) (33S6)	2.6"D X 9"L (45S6) (5.7cm X 25.4cm)(41S6) (6.6cm X 22.9cm) (45S6)

Ordering Information

For assistance, call toll-free at 1-800-343-4048 8AM to 6PM Eastern Time

Housing Only Model	Membrane Cartridge No. Required	Membrane Cartridges (Order Separately)	
		Box of 3	Box of 10
97S6	1	GS-3/050-05-95	GS-050-05-95
91S6	1	GS-3/050-11-95	GS-050-11-95
95S6	1	GS-3/050-11-95	GS-050-11-95
95T	1	GS-3/050-11-95	GS-050-11-95
31S6, 33S6	1	GS-3/100-12-95	GS-100-12-95
41S6, 45S6	1	GS-3/100-25-95	GS-100-25-95

Notes

1 Maximum pressure ratings are for temperatures to 200°F (93°C). Please consult factory for maximum pressure ratings at elevated temperatures.

2 Also available with 1/4" NPT ports, use designation Type 33S6-1/4 or 45S6-1/4.

3 Available with 1/4" socket weld for tubing size OD ports, use designation 97SW, 95SW, 33SW, 45SW, etc. Please consult factory for special pricing.

4 PTFE encapsulated Viton seals are standard.

5 Constructed of materials which comply with NACE Specification MR-01-75. Request Certificate of Compliance.

6 PTFE encapsulated Viton and other seals are available upon request. Please consult factory.

7 Drain port for types 31S6 & 41S6 is 1/4".

0.01 Micron Membrane Filters

High Pressure Membrane Filters - 1/2" Line Size

37/12, 37/25

316 stainless steel T-Type filters, 4000 psig rating. The Model 37 filters are also used when a larger line size or higher flow rate is required.



Model 37/12, 37/25
(37/25 Shown)

Principal Specifications		
Model	37/12	37/25
Inlet and Outlet Ports	1/2" NPT (5)	1/2" NPT (5)
Drain Port	1/8" NPT	1/8" NPT
Materials of Construction		
Head	316SS (2)	316SS (2)
Bowl	316SS (2)	316SS (2)
Internals	316SS (2)	316SS (2)
Seals	Viton (4)	Viton (4)
Maximum Temperature	400°F(204°C)(1)	400°F(204°C)(1)
Maximum Pressure	4000 psig	4000 psig
Shipping Weight	6 lb (2.7 kg)	10 lb (4.5 g)
Dimensions	2.75"Dia X 5.75"L (7cm X 14.6cm)	2.75"Dia X 10.25"L (7cm X 26cm)

Ordering Information		
For assistance, call toll-free at 1-800-343-4048		
	Membrane Cartridges (Order Separately)	
Housing Only Model	Box of 3	Box of 10
37/12	GS-3/100-12-95	GS-100-12-95
37/25	GS-3/100-25-95	GS-100-25-95

Notes

1 Maximum pressure ratings are for temperatures to 200°F (93°C). Please consult factory for maximum pressure ratings at elevated temperatures.

2 Constructed of materials which comply with NACE Specification MR-01-75. Request Certificate of Compliance.

3 Available with 1/2" socket weld for tubing size OD ports, use designation 37/12SW, 37/25SW.

4 PTFE encapsulated Viton and other seals are available upon request. Please consult factory.

5 For 1" line sizes up to 800 psig, consult factory.

0.01 Micron Membrane Filters

Flow Rates															
Filter Housing	Flow Rates, SCFM, at 2 psi Drop at Indicated Line Pressure (psig)														
	2	20	60	100	125	150	200	300	500	1000	2000	3000	4000	5000	
9933-05-95	0.5	1.0	1.5	2.0	2.2	—	—	—	—	—	—	—	—	—	
9922-11-95	0.5	1.0	1.7	2.2	2.3	—	—	—	—	—	—	—	—	—	
91S6	0.5	1.0	1.8	2.5	2.8	3.0	3.4	4.1	5.3	—	—	—	—	—	
95S6	0.5	1.0	1.8	2.5	2.8	3.0	3.4	4.1	5.3	7.4	10.5	12.9	14.8	16.5	
95T	0.5	1.0	1.8	2.5	2.8	3.0	—	—	—	—	—	—	—	—	
97S6	0.5	1.0	1.7	2.3	2.5	2.7	3.1	3.7	4.8	6.7	9.4	11.5	13.3	14.9	
31S6, 33S6	1.0	2.1	4.6	7.0	7.7	8.4	9.6	11.6	—	—	—	—	—	—	
37/12									14.8	20.8	29.3	35.9	41.4	—	
41S6, 45S6	3.0	6.0	13.0	20.0	22.0	24.0	27.4	—	—	—	—	—	—	—	
37/25								33.1	42.4	59.5	83.8	102.0	118.0	—	

North America

Engine Filtration

Parker Hannifin Corporation
Racor Division
3400 Finch Road
P.O. Box 3208
Modesto, CA 95354
phone 209 521 7860
fax 209 529 3278
www.parker.com/racor

Parker Hannifin Corporation
Racor Division
P.O. Box 6030
Holly Springs, MS 38635
phone 662 252 2656
fax 662 274 2118
www.parker.com/racor

Parker Hannifin Corporation
Racor Division
302 Parker Drive
Beaufort, SC 29906
phone 843 846 3200
fax 843 846 3230
www.parker.com/racor

Compressed Air Treatment

Parker Hannifin Corporation
Filtration and Separation Division
Balston Operation
242 Neck Road
Haverhill, MA 01835-0723
phone 978 858 0505
fax 978 556 7501
www.balstonfilters.com

Parker Hannifin Corporation
Filtration and Separation
Finite Filter Operation
500 Glaspie Street
P.O. Box 599
Oxford, MI 48371-5132
phone 248 628 6400
fax 248 628 1850
www.parker.com/finitefilter

Parker Hannifin Corporation
Airtek Division
4087 Walden Avenue
Lancaster, NY 14086
phone 716 685 4040
fax 716 685 1010
www.airtek.com

Hydraulic Filtration

Parker Hannifin Corporation
Hydraulic Filter Division
16810 Fulton County Road #2
Metamora, OH 43540-9714
phone 419 644 4311
fax 419 644 6205
www.parker.com/hydraulicfilter

Process Filtration

Parker Hannifin Corporation
Process Advanced Filtration
2340 Eastman Avenue
Oxnard, CA 93030
phone 805 604 3400
fax 805 604 3401
www.parker.com/processfiltration

Europe

Engine Filtration

Parker Hannifin Corporation
Filter Division Europe
Shaw Cross Business Park
Churwell Vale
Dewsbury, WF12 7RD England
phone +44 (0) 1924 487000
fax +44 (0) 1924 487038
www.parker.com/rfde

Compressed Air Treatment

Parker Hannifin Corporation
domnick hunter industrial operations
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear
England NE11 0PZ
phone +44 (0) 191 402 9000
fax +44 (0) 191 482 6296
www.domnickhunter.com

Parker Hannifin Corporation
Parker Hiross S.p.A.
Strada Zona Industriale, 4
35020, S. Angelo di Piove(PD), Italy
phone +39 049 9712 111
fax +39 049 7001 111
www.dh-hiross.com

Parker Hannifin Corporation
ZANDER Aufbereitungstechnik GmbH
Stammhaus Essen/Headquarter
Germany, Essen
Im Teelbruch 118
45219 Essen
phone +49 (0) 20 54 93 40
fax +49 (0) 20 54 93 41 64
www.zander.de

Hydraulic Filtration

Parker Hannifin Corporation
Hydraulic Filtration Division Europe
Stieltjesweg 8, 6827 BV Arnhem
P.O. Box 5008 6802 EA, Arnhem
Arnhem, Holland
phone +31 26 3760376
fax +31 26 3643620
www.parker.com/hfde

Parker Hannifin Corporation
Finn Filter Operation
Salmentie 260
FI-31700 Urjala as Finland
phone +358 20 753 2500
fax +358 20 753 2501
www.parker.com/hfde

Parker Hannifin Corporation
CMC Operation
Brunel Way
Thetford, Norfolk IP 24 1HP England
phone +44 1842 763299
fax +44 1842 756300
www.parker.com/hfde

Process Filtration

Parker Hannifin Corporation
domnick hunter process division
Durham Road, Birtley
Co. Durham, DH3 2SF England
phone +44 (0) 191 410 5121
fax +44 (0) 191 410 5312
www.domnickhunter.com

Asia Pacific

Parker Hannifin Corporation
Shanghai Co. Ltd.
280 YunQiao Road
JinQiao Export Processing Zone
Shanghai 101206 China
phone +86 21 5031 2525
fax +86 21 5834 3714
www.parker.com/china

Parker Hannifin Corporation
Singapore Pte Ltd.
Lot 558A, Jalan Subang 3
Off Persiaran Subang
Sungai Penaga Industrial Park
47610 Subang Jaya
Selangor Darul Ehsan, Malaysia
phone +60 3 5638 1476
fax +60 3 5638 1527
www.parker.com/malaysia

Parker Hannifin Corporation
Thailand Co. Ltd.
1023 3rd Floor, TPS Building
Pattanakam Road
Suanluang, Bangkok 10250 Thailand
phone +66 2717 8140
fax +66 2717 8148
www.parker.com/thailand

Parker Hannifin Corporation
Korea Ltd.
777 Jung-Ri
Dongtan-Myeon, Hwaseong-City
Kyunggi-Do, 445-813 Korea
phone +82 31 379 2200
fax +82 31 377 9710
www.parker.com/korea

Latin America

Parker Hannifin Corporation
Comercio Ltda. Filtration Division
Estrada Municipal Joel de Paula, 900
Eugenio de Melo, Sao Jose dos Campos
CEP 12225-390 SP Brazil
phone +55 (12) 4009 3500
fax +55 (12) 4009 3529
www.parker.com/br

© 2008 Parker Hannifin Corporation
April 2009

Bulletin FNS-D

Parker Hannifin Corporation
Filtration and Separation Division
242 Neck Road, P.O. Box 8223
Haverhill, MA 01835-0723
1-978-858-0505
1-978-556-7501 fax
1-800-343-4048 (US & Canada)
www.balstonfilters.com

